

RFM SERIES KITTED SIDE VENT READY CABINET



R. F. Mote Series Kitted Side Vent Ready Cabinets and Side Vent Duct Kits provides a solution for equipment with 'side to side' or 'side to rear' airflow requirements within hot aisle / cold aisle or chimney exhaust environments¹.

Each cabinet may be configured with a variety of side vent ducts and options such as: power bars, ground bars, fan assemblies, chimney ducts¹, cable troughs, vertical and horizontal cable managers, shelves, electronic door locks.

Standard Features Include:


- Heavy gauge steel, all welded construction
- Standard Heights: 83" / 90"
- Standard Depths: 36" / 42" / 48"
- Standard Widths: 30" / 36" / 40"
- Perforated, lockable, and lift off front and rear doors¹
- Doors: Electronic and Combination lock options available
- Solid, lockable, lift off side panels
- 2 Pair mounting rails, Side Vent ready, standard 19" EIA universal spacing for cage nuts
- Provisions for cable access provided in top of cabinet
- Removable top cover panel
- Open base for cable access
- 4 Grounding points
 - 2 in top (#10-32 x 1/2" stud)
 - 2 in base (1/4-20 x 3/4" stud)
- Adjustable levelling feet
- Hardware package (24 pcs. x 1/4-20 cage nuts and screws)
- Standard colour is textured black powdercoat
- Custom colours (e.g. RAL 7035) also available

Highlights:

- Various cabinet widths and heights
- Side vent kits feature adjustable height and depth to suit various switches and equipment
- Optimizes airflow (intake and exhaust) within a hot aisle / cold aisle or chimney exhaust environment¹

¹ When deploying within a chimney exhaust environment, the perforated rear door is replaced with a solid rear door.

TOP VIEW OF CABINET

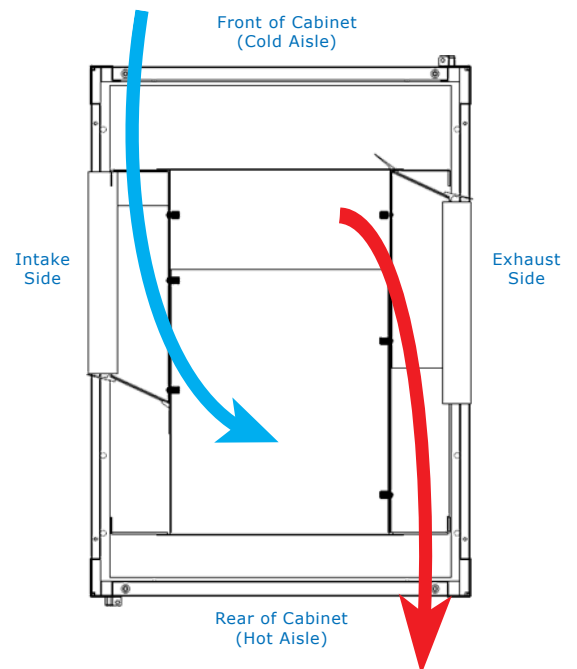

30", 36", and 40" Wide Cabinet - 19" EIA Mount

Part number	Part number	Width	Depth	Height	# of U's
RFM-304890-SVR-HC	RFM-304890-SVR-CE	30.150	48.150	90.00	48U
RFM-304290-SVR-HC	RFM-304290-SVR-CE	30.150	42.150	90.00	48U
RFM-303690-SVR-HC	RFM-303690-SVR-CE	30.150	36.150	90.00	48U
RFM-304883-SVR-HC	RFM-304883-SVR-CE	30.150	48.150	83.00	44U
RFM-304283-SVR-HC	RFM-304283-SVR-CE	30.150	42.150	83.00	44U
RFM-303683-SVR-HC	RFM-303683-SVR-CE	30.150	36.150	83.00	44U
RFM-364890-SVR-HC	RFM-364890-SVR-CE	36.150	48.150	90.00	48U
RFM-364290-SVR-HC	RFM-364290-SVR-CE	36.150	42.150	90.00	48U
RFM-363690-SVR-HC	RFM-363690-SVR-CE	36.150	36.150	90.00	48U
RFM-364883-SVR-HC	RFM-364883-SVR-CE	36.150	48.150	83.00	44U
RFM-364283-SVR-HC	RFM-364283-SVR-CE	36.150	42.150	83.00	44U
RFM-363683-SVR-HC	RFM-363683-SVR-CE	36.150	36.150	83.00	44U
RFM-404890-SVR-HC	RFM-404890-SVR-CE	40.150	48.150	90.00	48U
RFM-404290-SVR-HC	RFM-404290-SVR-CE	40.150	42.150	90.00	48U
RFM-404883-SVR-HC	RFM-404883-SVR-CE	40.150	48.150	83.00	44U
RFM-404283-SVR-HC	RFM-404283-SVR-CE	40.150	42.150	83.00	44U

Note:
RFM-xxxxxx-SVR-HC ships with 2 Perforated Doors (Front and Rear)
RFM-xxxxxx-SVR-CE ships with 1 Perforated Door (Front) and 1 Solid Door (Rear)